

Research Grade Microscope Camera

3.3 Million Pixels

A New Frontier in High-Speed
USB 2.0 Digital Imaging



DOCUMENT ARCHIVE PUBLISH



Powerful Imaging Technology at an Affordable Price.

- **Easy-to-use Camera Control and User Interface**
Results in simple and straight forward image acquisition with a variety of microscope applications.
- **High-Speed USB 2.0**
Delivers Plug-n-Play versatility with real-time video rate framing, focusing and fast image acquisition capability.
- **Sony® RGB Megapixel CCD**
Delivers outstanding color fidelity and detail in a variety of Biomedical and Industrial imaging applications.
- **12-bit Quantitative Data Mode**
Provides quantitative image data including 30-bits of color information resulting in 1024 intensity values per color.
- **Standard C-mount**
Facilitates installation on all microscope systems including upright, inverted and stereo configurations.

Technical Specifications

3.3 MPX™

Image Sensor:	Sony ICX262 3.3 progressive scan CCD sensor
Effective Pixels:	2080 X1536, 3.45um square pixels
Shutter:	Electronic, no moving parts
Readout Frequency:	20, 10, 5 and 2.5 MHZ
ROI:	8X8 pixels continuously variable up to full resolution - user selectable
Digital Output:	12-bit
Dimensions:	2.25 x 3.85 x 1.56 inches (W x H x D), ~150g / 300g (Mass)
Power Requirement:	USB bus power or external SVDC - 500 MA
Power Consumption:	~2.5Watts
Operating	
Temperature:	0° C to +50° C
Operating Humidity:	5%-95%, Non-condensing
Interface Connector:	Standard USB 2.0
Optical Mount:	Standard C-Mount
System	
Recommendations:	Pentium 4, 1.3 GHZ or better 512mb Ram, 20 MB HardDrive free space, USB 2.0 port Windows 2000 or Windows XP. Twain Compliant Capture Software

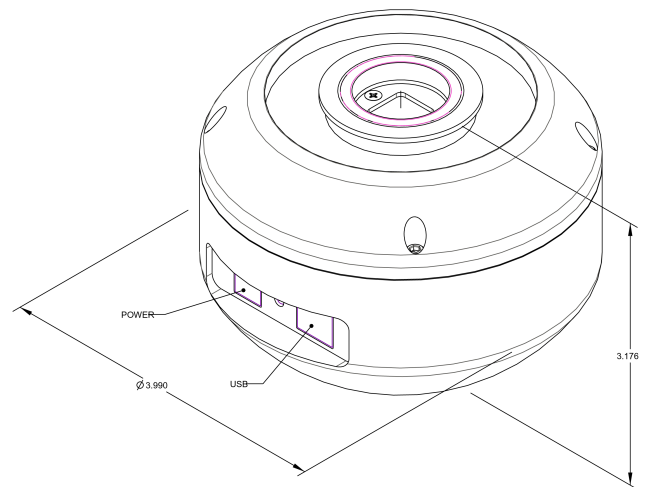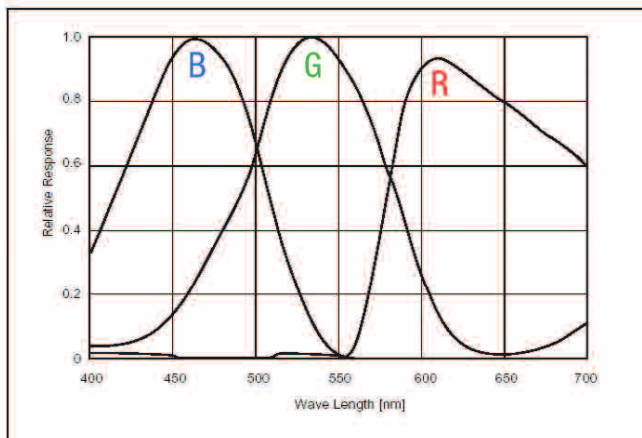

3.3MPX Dimensions

IMAGINGPLANET®
RESEARCH MICROSCOPY GROUP™

3.3MPX™ is distributed exclusively through ImagingPlanet and its network of authorized resellers worldwide.

IMAGINGPLANET.COM 175 Cremona Drive | Goleta, CA 93117 | 800.796.8909